



ASM-10-HP

**ANION EXCHANGE RESIN
ARSENIC SELECTIVE**

RESINTECH ASM-10-HP is a strongly basic hybrid anion exchange resin specially formulated to selectively remove arsenic. It is supplied in the salt form as clean, moist, tough, uniform, spherical beads.

RESINTECH ASM-10-HP exhibits extraordinary throughput capacity in arsenic removal service on potable water supplies. Its performance is virtually unaffected by common anions, such as chlorides, bicarbonates or sulfates. It is effective over the entire pH range of potable water.


RESINTECH ASM-10-HP is also available in organic trap, perchlorate selective and nitrate selective configured resins. These resins are fully selective for arsenic, but still retain their original ion exchange selectivity.

FEATURES & BENEFITS

- **TREMENDOUS AFFINITY FOR ARSENIC OVER OTHER ANIONS**
Highest arsenic removal capacity of organic based arsenic removal media
- **MADE FROM NSF/ANSI-61 VALIDATED ANION EXCHANGE RESIN**
- **NO ARSENIC DUMPING**
Effluent arsenic levels will not exceed influent levels if resin is operated past exhaustion point
- **EFFECTIVE ACROSS THE ENTIRE POTABLE WATER pH RANGE**
- **SINGLE USE OR REGENERABLE APPLICATIONS**
- **SUPERIOR PHYSICAL STABILITY**
Spherical and uniform particle size provide low pressure drop and greater resistance to bed compaction. Unlike granular, coated medias, ASM-10-HP will not shed particles.



Exhaustion Curve

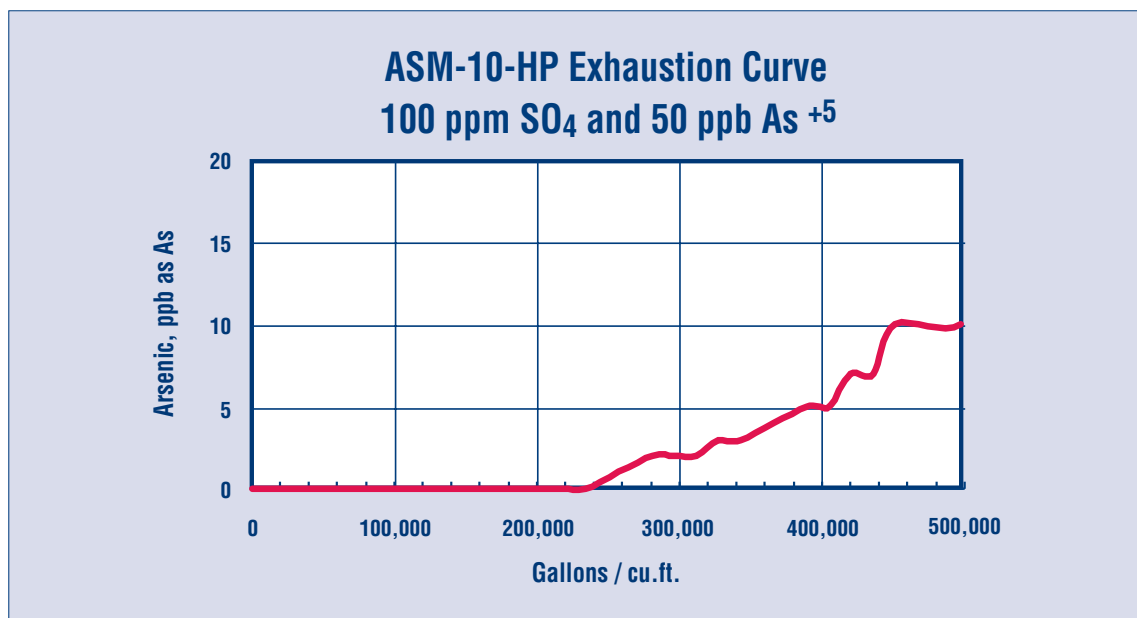

RESINTECH® ASM-10-HP

PHYSICAL PROPERTIES (CI form)

Polymer Structure	Styrene with DVB
Functional Group	R-N-R ⁺ Cl ⁻
Ionic Form, as shipped	Chloride
Physical Form	Tough, Spherical Beads
Screen Size Distribution	16 to 50 Nominal
- 50 mesh (U.S. Std)	Less than 1 Percent
pH Range	4 to 10
Water Retention	35 to 55 Percent
Solubility	Insoluble
Approximate Shipping Weight	43 lbs./ft ³
Total Capacity	>1.0 meq / mL
Sphericity	> 93 Percent


WATER QUALITY GUIDELINES

Feedwater quality (aside from arsenic) should generally be of potable quality. Please consult your ResinTech technical salesman for recommendations outside the following guidelines:

Conductivity	1000 micromhos/cm
Chloride	250 ppm
Sulfate	250 ppm
pH	5.5 to 9.5
Phosphate	5 ppm
Silica	10 ppm
Turbidity	5 NTU
Chlorine	0.3 ppm

HYDRAULIC PROPERTIES

Pressure Drop

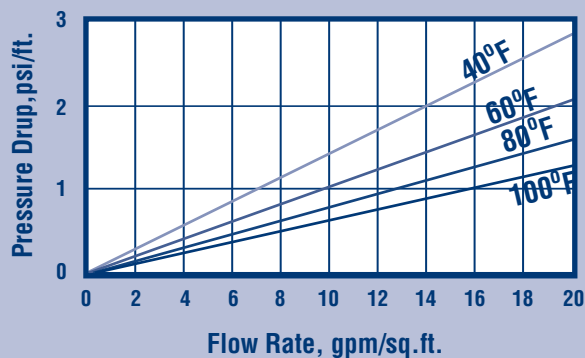

PRESSURE DROP

The graph above shows the expected pressure loss per foot of bed depth as a function of flow rate at various water temperatures.

SUGGESTED OPERATING CONDITIONS

Flow Rate	2 to 10 gpm/cu. ft. 1 to 20 gpm/sq. ft.
Pressure Loss	25 psi max.
Temperature	170°F max.

OPERATING CAPACITY

Under ideal conditions, the 1st cycle throughput capacity for arsenic removal with approximately 50 ppb As⁺⁵ in the inlet is greater than 500,000 gallons per cu. ft., while producing less than 10 ppb of effluent arsenic. The throughput capacity varies inversely with changes in the influent arsenic levels.

RESINTECH ASM-10-HP has modest capacity for arsenite (As⁺³). It is suggested that if the arsenite concentration exceeds 20% of the total arsenic present, the feedwater should be pre-chlorinated to ensure conversion to arsenate (As⁺⁵).

ASM-10-HP is also selective for other oxy-anions, such as selenate. It will remove modest amounts of both phosphate and silica.


REGENERATION

ResinTech ASM-10-HP can be partially regenerated in the field with alkaline brine. For additional information contact your local ResinTech representative.

DISPOSAL

It is recommended that users review local regulations and consult with local authorities on the best method of disposal.

Backwash Expansion

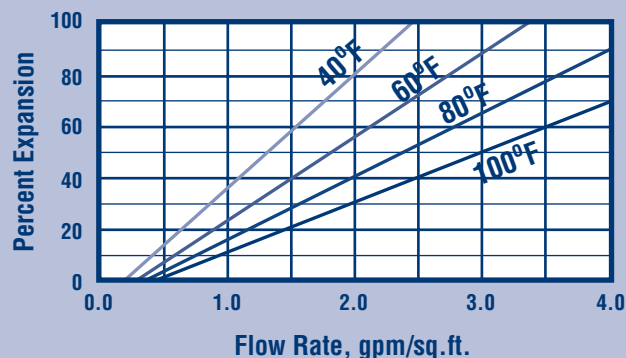

BACKWASH

After each cycle the resin bed should be backwashed at a rate that expands the bed 50 to 75 percent. This will remove any foreign matter and reclassify the bed.

***CAUTION:DO NOT MIX ION EXCHANGE RESIN WITH STRONG OXIDIZING AGENTS.** Nitric acid and other strong oxidizing agents can cause explosive reactions when mixed with organic materials, such as ion exchange resins.

Material Safety Data Sheets (MSDS) are available for all ResinTech Inc. products. To obtain a copy, contact your local ResinTech sales representative or our corporate headquarters.

They contain important health and safety information. That information may be needed to protect your employees and customers from any known health and safety hazards associated with our products. We recommend that you secure and study the pertinent MSDS for our products and any other products being used. These suggestions and data are based on information we believe to be reliable. They are offered in good faith. However, we do not make any guarantee or warranty. We caution against using these products in an unsafe manner or in violation of any patents; further, we assume no liability for the consequences of any such actions.

RESINTECH is a registered trademark ® of RESINTECH INC.

ASM-10-HP091604